


Hyperspectral Camera Instrument Control Unit

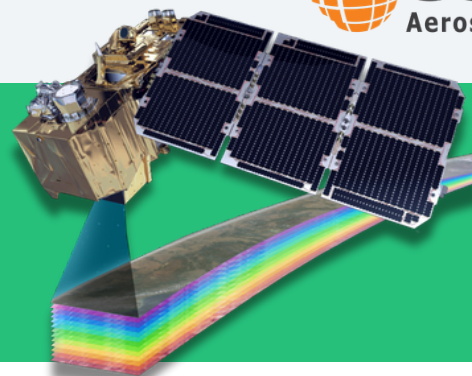

Powerful universal payload computer for new space satellite platforms and compatible with cubesat platforms. The dimensions are matched with the PC104 form factor.

The powerful System on Chip combining multi-core processor and programmable logic array allows efficient and real-time execution of complex algorithms to process raw data on-board, thus reducing space to ground communications bandwidth needs.

Integrated mass memory for storage of acquired data allows to use of the ICU without needs of platform data storage. Data is accessible via Cubesat Space Protocol or ECSS PUS-C via platform communication bus.

Latch-up protection of the ICU and imaging sensor is assured by constant current monitoring and several mitigation techniques.

KEY FEATURES

- Four 64-bit Linux capable user cores + one supervisor core
- Programmable logic array for image sensor readout and functionality extension
- Multiple image sensors readout possible
- Warm/cold redundancy support
- On-board current, voltage and temperature monitoring
- Latch-up monitoring
- On-board data storage
- Users script support for ICU control and data pre-processing (MicroPython)
- Software and programmable logic upgradable

TECHNICAL SPECIFICATIONS

General

Processor	5x RISC-V 64-bit
Logical blocks	254 k (461 k optional)
Processor clock	up to 625 MHz
Program. logic clock	up to 343 MHz
DRAM CPU	1024 MB (ECC)
DRAM FPGA	1024 MB (ECC) (2048 MB optional)
NVM (program)	256 M (redundant)
NVM (configuration)	8 MB (redundant)
Mass storage	32 GB SLC NAND (redundant)
Power supply	5 V (4.5 V - 9.6 V) (28 V optional)
Power supply	up to 10 W
Op. temperature	-40°C to +60°C
Non-op. temperature	-50°C to +85°C

Interfaces

CAN	2x
RS422/RS-485	2x
UART 3.3 V	1x
PPS (RS-422)	1x
GPIO 3.3 V logic	8x
Debug UART	5x
JTAG for SoC	1x
Ethernet up to 1Gbps	1x (2x optional)
Image sensor	up to 16x lanes (SerDes 12.7 Gbps) up to 36x pairs (LVDS 1250 Mbps)

Size and Weight

Length	96 mm
Width	91 mm
Height	35 mm (TBC)
Mass	350 g (TBC)




Contact us

+ 420 284 683 784
info@esc-aerospace.cz
www.esc-aerospace.com

esc|CU

Hyperspectral Camera Instrument Control Unit

Powerful universal payload computer for new space satellite platforms and compatible with cubesat platforms. The dimensions are matched with the PC104 form factor.

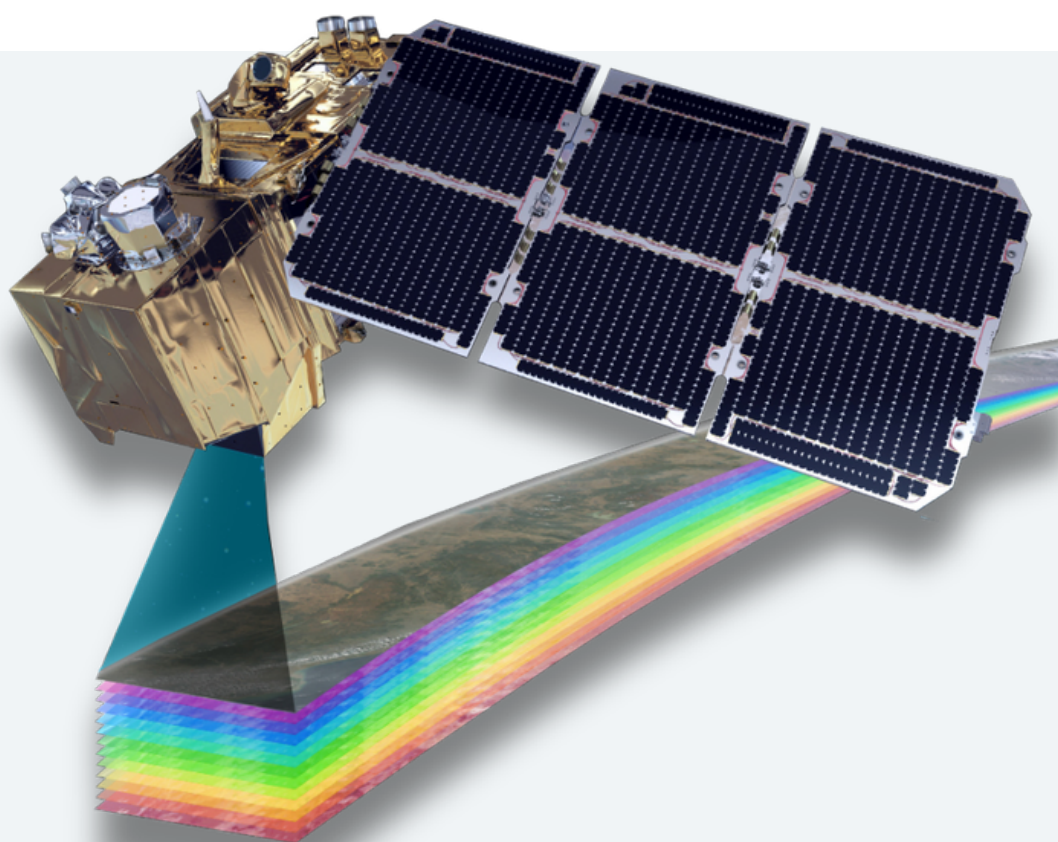

Contact us

+ 420 284 683 784

info@esc-aerospace.cz

www.esc-aerospace.com

esc Aerospace as product neutral systems integrator and HW/SW product developer with a focus on Space and Defence offers: Mission Critical Software; Multipurpose Drive Electronics; On-Board Systems; DPU with subsystems MMU, PCDU, RTU, SDR; Space qualified On-board Computer (OBC, OBDH); Secure Communication; SATCOM, QKD; True Random Generator; Payloads: Hyperspectral Cameras, Lidars, Ionizing Radiation Detectors Space Pix; EGSEs/SCOE; Avionics for Unmanned Systems.

Making things fly | esc Aerospace © 2026